

30

AGE series

30X30X10mm

●General Specification


- Motor / DC single phase brushless motor
- Material / Frame : PBT (94V-0) ; Impeller : PBT(94V-0)
- Operation temp. / Two ball bearing : -10°C~70°C
FMB,sleeve Bearing : -10°C~50°C
- Storage temp. / -40°C~80°C
- Non-condensing environment
- Weight / 10g



●Specification *Bearing system B:two ball bearing F:fluid bearing S:sleeve bearing

Model	*Bearing System	Rated Voltage	Operating Voltage	Rated Current	Rated Speed	Maximum Air Flow	Maximum Static Pressure	Sound Level	P-Q Curve		
P/N	B / S / F	V	V	A	RPM	m ³ /min	CFM	Pa	In-H ₂ O	dB(A)	No.
AGE03010_05L	B / F	5	4.5~5.5	0.09	6000	0.08	2.99	22.4	0.09	17	①
AGE03010_05M	B / F	5	4.5~5.5	0.12	7500	0.11	3.73	34.9	0.14	24	②
AGE03010_05H	B / F	5	4.5~5.5	0.24	9000	0.13	4.48	52.3	0.21	29	③
AGE03010_05U	B / F	5	4.5~5.5	0.27	11000	0.16	5.65	59.8	0.24	31	④
AGE03010_12L	B / F	12	7.0~13.2	0.03	6000	0.08	2.99	22.4	0.09	17	①
AGE03010_12M	B / F	12	7.0~13.2	0.05	7500	0.11	3.73	35.8	0.14	24	②
AGE03010_12H	B / F	12	7.0~13.2	0.07	9000	0.13	4.48	52.3	0.21	29	③
AGE03010_12U	B / F	12	7.0~13.2	0.09	11000	0.16	5.65	59.8	0.24	31	④

● Drawing & panel out-cuts

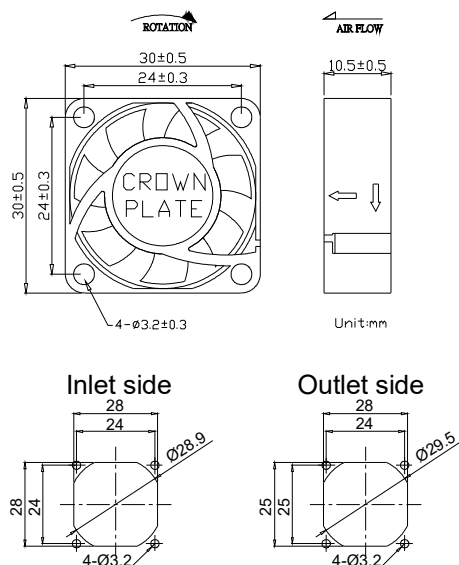

● Characteristic Curves

