

40

AGE series

40X40X10mm

● General Specification


- Motor / DC single phase brushless motor
- Material / Frame : PBT (94V-0) ; Impeller : PBT(94V-0)
- Operation temp. / Two ball bearing : -10°C~70°C
FMB,sleeve Bearing : -10°C~50°C
- Storage temp. / -40°C~80°C
- Non-condensing environment
- Weight / 20g



● Specification *Bearing system B:two ball bearing F:fluid bearing S:sleeve bearing

Model	*Bearing System	Rated Voltage	Operating Voltage	Rated Current	Rated Speed	Maximum Air Flow	Maximum Static Pressure	Sound Level	P-Q Curve		
P/N	B / S / F	V	V	A	RPM	m ³ /min	CFM	Pa	In-H ₂ O	dB(A)	No.
AGE04010_05L	B / F / S	5	4.5~5.5	0.14	4000	0.13	4.75	13.9	0.06	21	①
AGE04010_05M	B / F / S	5	4.5~5.5	0.18	6000	0.21	7.24	28.6	0.11	26	②
AGE04010_05H	B / F / S	5	4.5~5.5	0.29	8000	0.26	9.25	50.0	0.20	35	③
AGE04010_12M	B / F / S	12	7.0~13.2	0.10	4000	0.13	4.75	13.9	0.06	21	①
AGE04010_12H	B / F / S	12	7.0~13.2	0.11	6000	0.21	7.24	28.6	0.11	26	②
AGE04010_12U	B / F / S	12	7.0~13.2	0.14	8000	0.26	9.25	50.0	0.20	33	③
AGE04010_12V	B / F / S	12	7.0~13.2	0.18	10000	0.35	12.23	82.6	0.33	39	④
AGE04010_24 L	B / F / S	24	14.0~26.4	0.06	4000	0.13	4.75	13.9	0.06	21	①
AGE04010_24M	B / F / S	24	14.0~26.4	0.09	8000	0.26	9.25	50.0	0.20	33	③
AGE04010_24H	B / F / S	24	14.0~26.4	0.09	10000	0.35	12.23	82.6	0.33	39	④

● Drawing & panel out-cuts

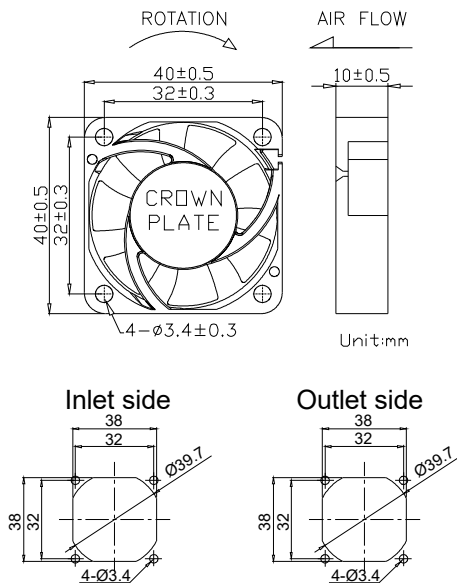

● Characteristic Curves

