

# 40

## AGB series

### 40X40X28mm

#### ● General Specification


- Motor / DC single phase brushless motor
- Material / Frame : PBT (94V-0) ; Impeller : PBT(94V-0)
- Operation temp. / Two ball bearing : -10°C~70°C  
FMB,sleeve Bearing : -10°C~50°C
- Storage temp. / -40°C~80°C
- Non-condensing environment
- Weight / 58g



#### ● Specification \*Bearing system B:two ball bearing F:fluid bearing S:sleeve bearing

Model	*Bearing System	Rated Voltage	Operating Voltage	Rated Current	Rated Speed	Maximum Air Flow	Maximum Static Pressure	Sound Level	P-Q Curve		
P/N	B / S / F	V	V	A	RPM	m <sup>3</sup> /min	CFM	Pa	In-H <sub>2</sub> O	dBA	No.
AGB04028_12L	B	12	7.0~13.2	0.14	8000	0.40	13.8	114.5	0.46	38	①
AGB04028_12M	B	12	7.0~13.2	0.26	9500	0.45	15.9	171.8	0.69	44	②
AGB04028_12H	B	12	7.0~13.2	0.35	11000	0.53	18.7	229.1	0.92	51	③
AGB04028_12U	B	12	7.0~13.2	0.55	13000	0.67	23.8	328.7	1.32	54	④
AGB04028_12V	B	12	7.0~13.2	0.64	15000	0.70	24.8	407.9	1.64	58	⑤
AGB04028_24L	B	24	14.0~26.4	0.10	8000	0.40	13.8	114.5	0.46	38	①
AGB04028_24M	B	24	14.0~26.4	0.15	9500	0.45	15.9	171.8	0.69	44	②
AGB04028_24H	B	24	14.0~26.4	0.20	11000	0.53	18.7	229.1	0.92	51	③
AGB04028_24U	B	24	14.0~26.4	0.27	13000	0.67	23.8	328.7	1.32	54	④

#### ● Drawing & panel out-cuts

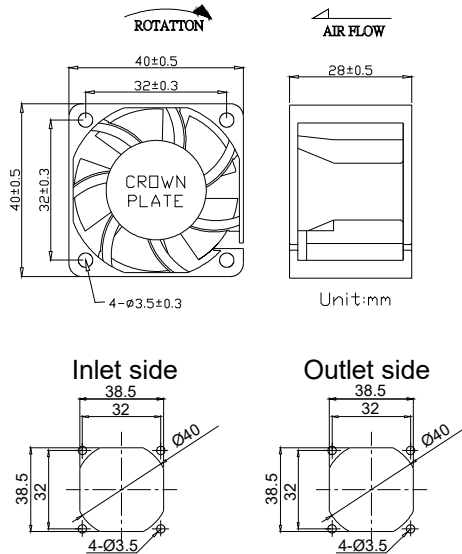

#### ● Characteristic Curves

