

60

AGE series

60X60X10mm

● General Specification


- Motor / DC single phase brushless motor
- Material / Frame : PBT (94V-0) ; Impeller : PBT(94V-0)
- Operation temp. / Two ball bearing : -10°C~70°C
FMB,sleeve Bearing : -10°C~50°C
- Storage temp. / -40°C~80°C
- Non-condensing environment
- Weight / 37g



● Specification *Bearing system B:two ball bearing F:fluid bearing S:sleeve bearing

Model	*Bearing System	Rated Voltage	Operating Voltage	Rated Current	Rated Speed	Maximum Air Flow	Maximum Static Pressure	Sound Level	P-Q Curve		
P/N	B / S / F	V	V	A	RPM	m³/min	CFM	Pa	In-H ₂ O	dBA	No.
AGE06010_05L	B / F	5	4.5~5.5	0.30	3500	0.56	14.3	20.4	0.08	28	①
AGE06010_05M	B / F	5	4.5~5.5	0.38	4200	0.67	17.1	29.4	0.12	33	②
AGE06010_05H	B / F	5	4.5~5.5	0.42	4900	0.78	19.9	40.1	0.16	37	③
AGE06010_12L	B / F	12	7.0~13.2	0.14	3500	0.56	14.3	20.4	0.08	28	①
AGE06010_12M	B / F	12	7.0~13.2	0.17	4200	0.67	17.1	29.4	0.12	33	②
AGE06010_12U	B / F	12	7.0~13.2	0.20	4900	0.78	19.9	40.1	0.16	37	③
AGE06010_24L	B / F	24	14.0~26.4	0.05	3500	0.56	14.3	20.4	0.08	28	①
AGE06010_24M	B / F	24	14.0~26.4	0.08	4200	0.67	17.1	29.4	0.12	33	②
AGE06010_24H	B / F	24	14.0~26.4	0.10	4900	0.78	19.9	40.1	0.16	37	③

● Drawing & panel out-cuts

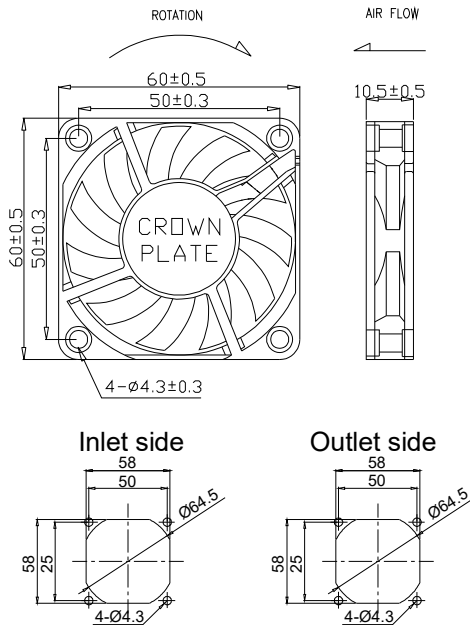

● Characteristic Curves

