

60

AGE series

60X60X20mm

●General Specification


- Motor / DC single phase brushless motor
- Material / Frame : PBT (94V-0) ; Impeller : PBT(94V-0)
- Operation temp. / Two ball bearing : -10°C~70°C
FMB,sleeve Bearing : -10°C~50°C
- Storage temp. / -40°C~80°C
- Non-condensing environment
- Weight / 50g



●Specification *Bearing system B:two ball bearing F:fluid bearing S:sleeve bearing

Model	*Bearing System	Rated Voltage	Operating Voltage	Rated Current	Rated Speed	Maximum Air Flow	Maximum Static Pressure	Sound Level	P-Q Curve		
P/N	B / S / F	V	V	A	RPM	m ³ /min	CFM	Pa	In-H ₂ O	dBA	No.
AGE06020_12J	B / S	12	7.0~13.2	0.07	3200	0.38	13.5	29.9	0.12	24	①
AGE06020_12L	B / S	12	7.0~13.2	0.09	3600	0.42	14.8	37.4	0.15	26	②
AGE06020_12M	B / S	12	7.0~13.2	0.11	4000	0.46	16.4	47.3	0.19	29	③
AGE06020_12H	B / S	12	7.0~13.2	0.13	4400	0.51	18.1	57.3	0.23	31	④
AGE06020_12U	B / S	12	7.0~13.2	0.17	4800	0.56	19.6	67.2	0.27	33	⑤

● Drawing & panel out-cuts

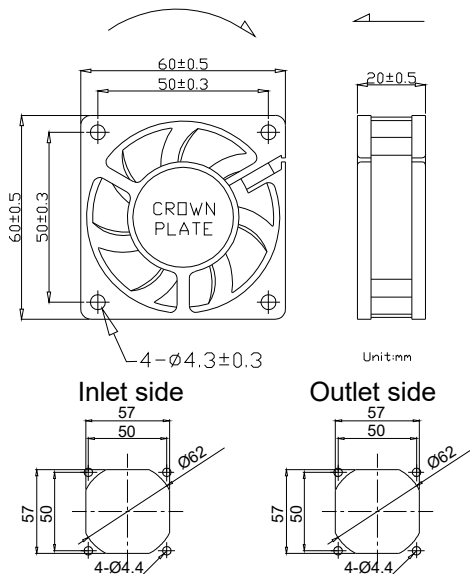

● Characteristic Curves

