

# 60

## AGB series

### 60X60X56mm

#### ●General Specification


- Motor / DC single phase brushless motor
- Material / Frame : PBT (94V-0) ; Impeller : PBT(94V-0)
- Operation temp. / Two ball bearing : -10°C~70°C  
FMB,sleeve Bearing : -10°C~50°C
- Storage temp. / -40°C~80°C
- Non-condensing environment
- Weight / 180g



#### ●Specification \*Bearing system B:two ball bearing F:fluid bearing S:sleeve bearing

Model	*Bearing System	Rated Voltage	Operating Voltage	Rated Current	Rated Speed	Maximum Air Flow	Maximum Static Pressure	Sound Level	P-Q Curve		
P/N	B / S / F	V	V	A	RPM	m³/min	CFM	Pa	In-H <sub>2</sub> O	dBA	No.
AGB06056B12H	B	12	7.0~13.2	1.00	12500 14500	1.30	45.76	654.9	2.63	63	①
AGB06056B12U	B	12	7.0~13.2	1.45	15200 17000	1.52	53.82	968.6	3.89	69	②

#### ● Drawing & panel out-cuts

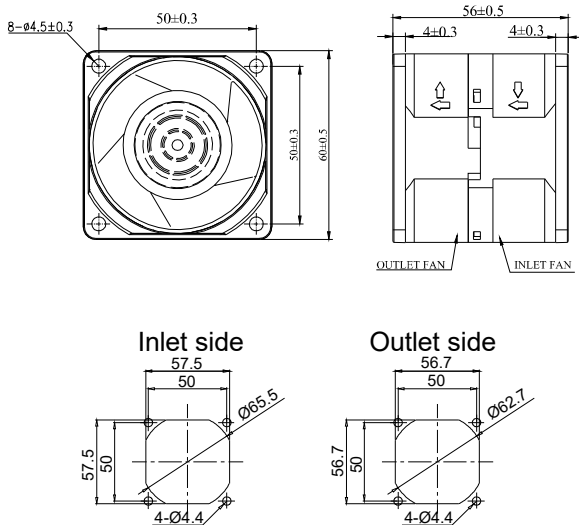

#### ● Characteristic Curves

