

150 AGF series

150X172X51mm

● General Specification


- Motor / DC single phase brushless motor
- Material / Frame : PBT (94V-0) ; Impeller : PBT(94V-0)
- Operation temp. / Two ball bearing : -10°C~70°C
FMB,sleeve Bearing : -10°C~50°C
- Storage temp. / -40°C~80°C
- Non-condensing environment
- Weight / 700g



● Specification *Bearing system B:two ball bearing F:fluid bearing S:sleeve bearing

Model	*Bearing System	Rated Voltage	Operating Voltage	Rated Current	Rated Speed	Maximum Air Flow	Maximum Static Pressure	Sound Level	P-Q Curve		
P/N	B / S / F	V	V	A	RPM	m ³ /min	CFM	Pa	In-H ₂ O	dBA	No.
AGF15051B24L	B	24	14.0~26.4	1.00	4000	8.80	310.6	296.3	1.19	60	①
AGF15051B24M	B	24	14.0~26.4	1.40	4400	9.93	350.5	366.0	1.47	62	②
AGF15051B24H	B	24	14.0~26.4	1.60	4800	10.77	380.3	435.8	1.75	64	③
AGF15051B24U	B	24	14.0~26.4	2.40	5200	11.63	410.5	517.9	2.08	67	④
AGF15051B48L	B	48	28.0~56.0	0.71	4000	8.80	310.6	296.3	1.19	60	①
AGF15051B48M	B	48	28.0~56.0	0.88	4400	9.93	350.5	366.0	1.47	62	②
AGF15051B48H	B	48	28.0~56.0	1.22	4800	10.77	380.3	435.8	1.75	64	③
AGF15051B48U	B	48	28.0~56.0	1.52	5200	11.63	410.5	517.9	2.08	67	④

● Drawing & panel out-cuts

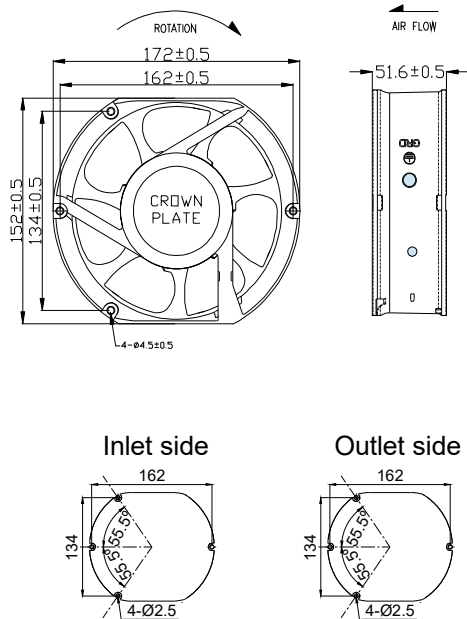

● Characteristic Curves

