

92

AGD series

92X92X25mm



●General Specification / 一般規格




- Motor / DC brushless motor
- Material / Frame : plastic(94V-0)
- Impeller : plastic(94V-0)
- Bearing / Ball bearing;FMB
- Weight / 89g
- 馬達 / 直流單向無刷馬達
- 材質 / 框：塑膠(94V-0)
- 葉：塑膠(94V-0)
- 軸承 / 滾珠軸承;FMB
- 重量 / 89克

●Specification / 詳細規格 *軸承/bearing B: 雙滾珠/ball bearing F:FMB S: 含油軸承/sleeve bearing

Model	Bearing	Voltage	Operating Vol.	Current	Speed	Max. Air Flow	Max. Static Pressure	Sound	P-Q		
機型	軸承	電壓	操作電壓	電流	轉速	最大風量	最大風壓	噪音	P-Q曲線		
PN	B/S/F	V	V	A	RPM	m³/min	CFM	Pa	In-H ₂ O	dBA	No.
AGD09225_12J	B	12	7.0~13.2	0.10	1800	1.05	37.3	20.1	0.08	25	①
AGD09225_12L	B	12	7.0~13.2	0.12	2300	1.40	49.5	33.1	0.13	31	②
AGD09225_12M	B	12	7.0~13.2	0.21	2800	1.48	59.9	47.6	0.19	37	③
AGD09225_12H	B	12	7.0~13.2	0.32	3300	2.06	72.7	65.2	0.26	42	④
AGD09225_12U	B	12	7.0~13.2	0.40	3800	2.31	81.5	85.9	0.34	46	⑤
AGD09225_12V	B	12	7.0~13.2	0.75	4800	2.91	102.6	99.6	0.40	53	⑥
AGD09225_24J	B	24	14.0~26.4	0.08	1800	1.05	37.3	20.1	0.08	25	①
AGD09225_24L	B	24	14.0~26.4	0.10	2300	1.40	49.5	33.1	0.13	31	②
AGD09225_24M	B	24	14.0~26.4	0.12	2800	1.48	59.9	47.6	0.19	37	③
AGD09225_24H	B	24	14.0~26.4	0.18	3300	2.06	72.7	65.2	0.26	42	④
AGD09225_24U	B	24	14.0~26.4	0.25	3800	2.31	81.5	85.9	0.34	46	⑤
AGD09225_24V	B	24	14.0~26.4	0.40	4800	2.91	102.6	130.9	0.53	53	⑥

● Drawing & panel out-cuts/ 圖面及出入風口

● Characteristic Curves/ 特性曲線

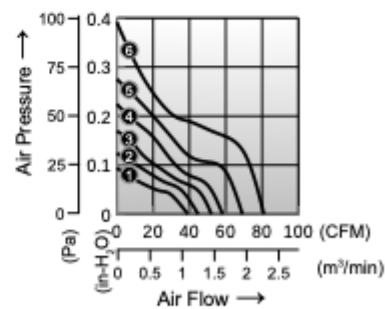

Specification is subject to change for improvement without notice / 基於改良的規格變更，不另行通知

<http://www.crownthermal.com>