

60

AGE series

60X60X15mm

●General Specification


- Motor / DC single phase brushless motor
- Material / Frame : PBT (94V-0) ; Impeller : PBT(94V-0)
- Operation temp. / Two ball bearing : -10°C~70°C
FMB,sleeve Bearing : -10°C~50°C
- Storage temp. / -40°C~80°C
- Non-condensing environment
- Weight / 44g



●Specification *Bearing system B:two ball bearing F:fluid bearing S:sleeve bearing

Model	*Bearing System	Rated Voltage	Operating Voltage	Rated Current	Rated Speed	Maximum Air Flow		Maximum Static Pressure		Sound Level	P-Q Curve
P/N	B / S / F	V	V	A	RPM	m³/min	CFM	Pa	In-H ₂ O	dBA	No.
AGE06015_12J	B / F	12	7.0~13.2	0.06	3000	0.43	15.0	22.4	0.09	24	①
AGE06015_12L	B / F	12	7.0~13.2	0.08	3500	0.54	19.0	34.9	0.14	29	②
AGE06015_12M	B / F	12	7.0~13.2	0.10	4000	0.62	21.7	39.8	0.16	32	③
AGE06015_12H	B / F	12	7.0~13.2	0.12	4500	0.65	23.1	44.8	0.18	35	④
AGE06015_12U	B / F	12	7.0~13.2	0.17	5000	0.75	26.5	57.3	0.23	37	⑤
AGE06015_24L	B / F	24	14.0~26.4	0.08	3500	0.54	19.0	34.9	0.14	29	②
AGE06015_24M	B / F	24	14.0~26.4	0.07	4000	0.62	21.7	39.8	0.16	32	③
AGE06015_24H	B / F	24	14.0~26.4	0.08	4500	0.65	23.1	44.8	0.18	35	④
AGE06015_24H1	B / F	24	14.0~26.4	0.11	5000	0.75	26.5	57.3	0.23	37	⑤

● Drawing & panel out-cuts

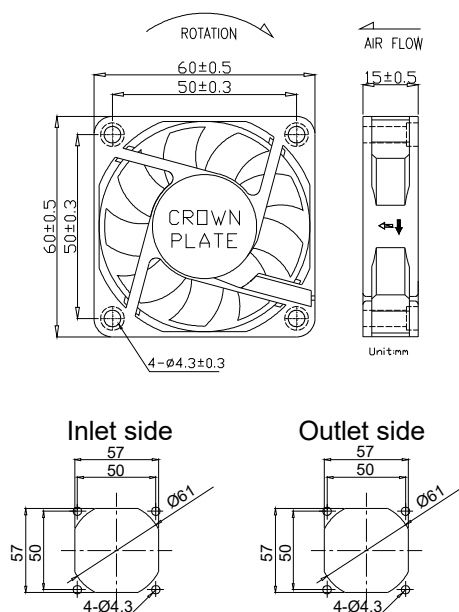

● Characteristic Curves

