

DC Cross
Flow Fan

CA Series



●General Specification




●Motor DC single/three phase brushless motor

●Material Frame: Steel / Impeller:Al alloy


●Performance Specification

Model	A	Size B	C	Rated Voltage	Rated Current	Rated Speed	Maximum		Maximum		Sound Level	P-Q Curve
							Air Flow		Static Pressure			
No.		mm		V	A	RPM	m³/h	CFM	Pa	In-H₂O	dBA	No.
CAD50090B12M	155	110	100	12	0.16	2700	30	17.7	19	0.076	38	①
CAD50090B24M				24	0.10	2700	30	17.7	19	0.076	38	①
CAD50150B12M	215	170	160	12	0.21	2500	45	26.5	13	0.052	39	②
CAD50150B24M				24	0.12	2500	45	26.5	13	0.052	39	②
CAD50190B12M	256	210	200	12	0.28	2600	62	36.5	14	0.056	41	①
CAD50190B24M				24	0.15	2600	62	36.5	14	0.056	41	①
CAD50250B12M	302	260	250	12	0.35	2500	80	47.1	13	0.052	42	②
CAD50250B24M				24	0.18	2500	80	47.1	13	0.052	42	②
CAD50290B12M	340	310	300	12	0.35	2500	91	53.6	13	0.052	43	①
CAD50290B24M				24	0.18	2500	91	53.6	13	0.052	43	①
CAD50350B12M	410	370	360	12	0.40	2400	105	61.8	13	0.052	44	②
CAD50350B24M				24	0.21	2400	105	61.8	13	0.052	44	②
CAD50420B12M	475	430	420	12	0.46	2300	121	71.2	12	0.048	46	③
CAD50420B24M				24	0.23	2300	121	71.2	12	0.048	46	③

- P-Q Curves / P-Q 曲線

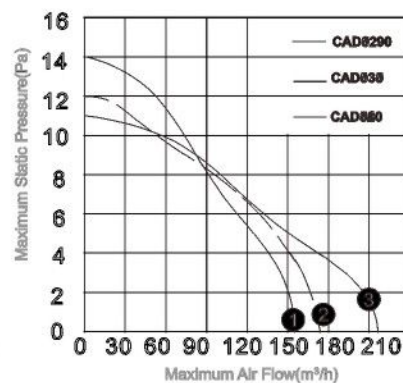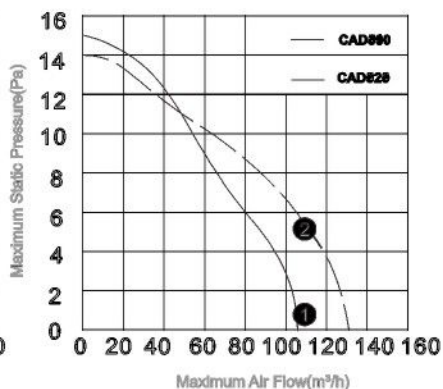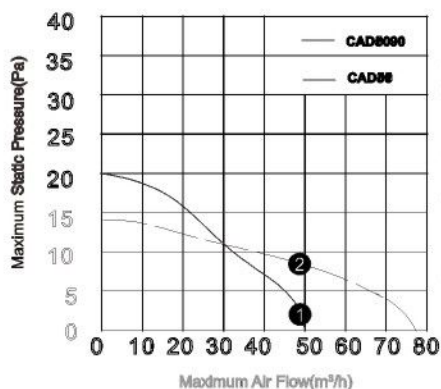

- Drawing

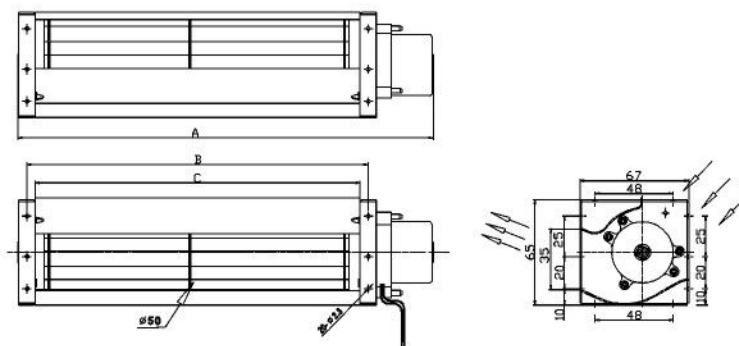

Specification is subject to change for improvement without notice / 基於改良的規格變更, 不另行通知