

60

DC Cross
Flow Fan

CF Series



●General Specification




●Motor DC single/three phase brushless motor

●Material Frame: Steel / Impeller:Al alloy



●Performance Specification

Model	A	Size B	C	Rated Voltage	Rated Current	Rated Speed	Maximum Air Flow		Maximum Static Pressure		Sound Level	P-Q Curve
No.		mm		V	A	RPM	m³/h	CFM	Pa	In-H₂O	dBA	No.
CFD60120B12M	186	138	123	12	0.74	2600	102	60.0	49	0.197	44	①
CFD60120B24M				24	0.35	2600	102	60.0	49	0.197	44	①
CFD60190B12M	246	199	184	12	1.00	2400	139	81.8	45	0.181	44	②
CFD60190B24M				24	0.47	2400	139	81.8	45	0.181	44	②
CFD60250B12M	307	259	245	12	1.20	2200	169	99.5	41	0.165	44	①
CFD60250B24M				24	0.55	2200	169	99.5	41	0.165	44	①
CFD60300B12M	368	321	306	12	1.35	2100	192	113.0	39	0.157	45	②
CFD60300B24M				24	0.63	2100	192	113.0	39	0.157	45	②
CFD60360B12M	430	383	368	12	1.45	2000	212	124.8	37	0.150	46	①
CFD60360B24M				24	0.67	2000	212	124.8	37	0.150	46	①
CFD60420B12M	492	444	429	12	1.53	1900	254	149.5	33	0.134	47	②
CFD60420B24M				24	0.73	1900	254	149.5	33	0.134	47	②

- P-Q Curves

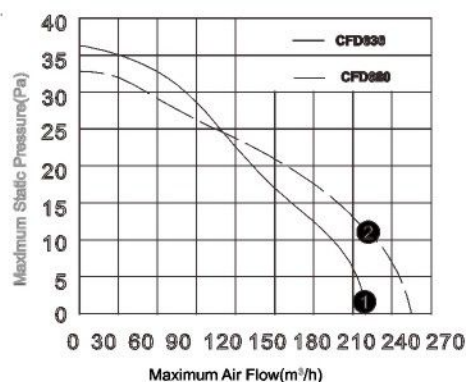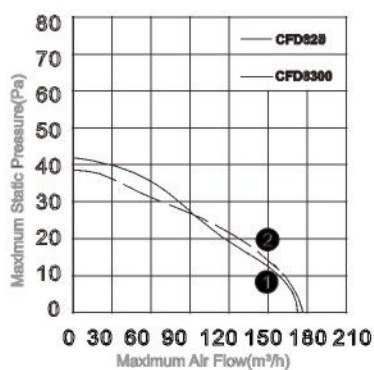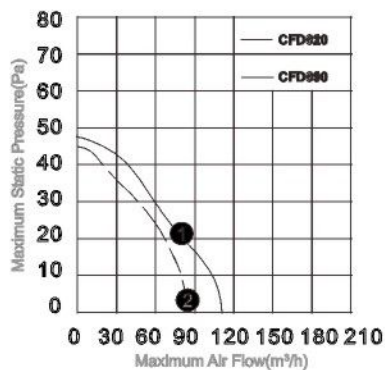

- Drawing

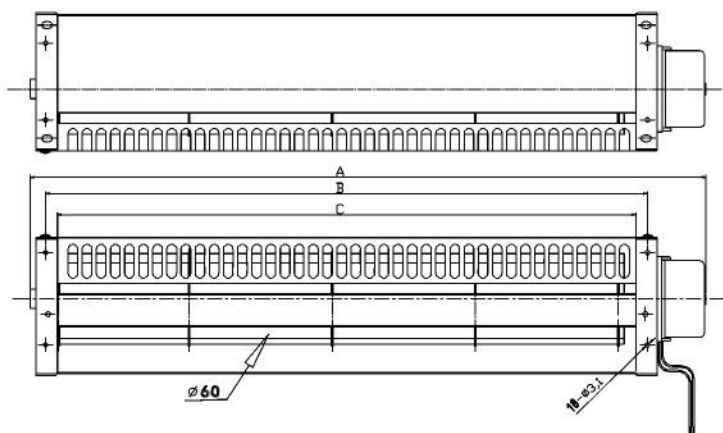

Specification is subject to change for improvement without notice / 基於改良的規格變更，不另行通知