

DC Cross
Flow Fan

CB Series



●General Specification




●Motor DC single/three phase brushless motor

●Material Frame: Steel / Impeller:Al alloy



●Performance Specification

Model	A	Size B	C	Rated Voltage	Rated Current	Rated Speed	Maximum		Maximum		Sound Level	P-Q Curve
							Air Flow		Static Pressure			
No.		mm		V	A	RPM	m³/h	CFM	Pa	In-H₂O	dBA	No.
CBD40090B12M	145	108	98	12	0.12	3000	42	24.7	28	0.114	33	①
CBD40090B24M				24	0.07	3000	42	24.7	28	0.114	33	①
CBD40150B12M	210	170	160	12	0.18	2700	60	35.3	25	0.102	34	②
CBD40150B24M				24	0.10	2700	60	35.3	25	0.102	34	②
CBD40190B12M	230	208	198	12	0.20	2500	84	49.4	25	0.098	35	①
CBD40190B24M				24	0.12	2500	84	49.4	25	0.098	35	①
CBD40250B12M	300	260	250	12	0.23	2400	107	63.0	24	0.094	36	②
CBD40250B24M				24	0.13	2400	107	63.0	24	0.094	36	②
CBD40290B12M	352	310	300	12	0.26	2300	126	74.2	21	0.083	37	①
CBD40290B24M				24	0.14	2300	126	74.2	21	0.083	37	①
CBD40350B12M	417	358	348	12	0.29	2200	144	84.7	20	0.079	38	②
CBD40350B24M				24	0.16	2200	144	84.7	20	0.079	38	②
CBD40450B12M	472	430	420	12	0.32	2000	156	91.8	18	0.071	39	③
CBD40450B24M				24	0.17	2000	156	91.8	18	0.071	39	③

- P-Q Curves



- Drawing

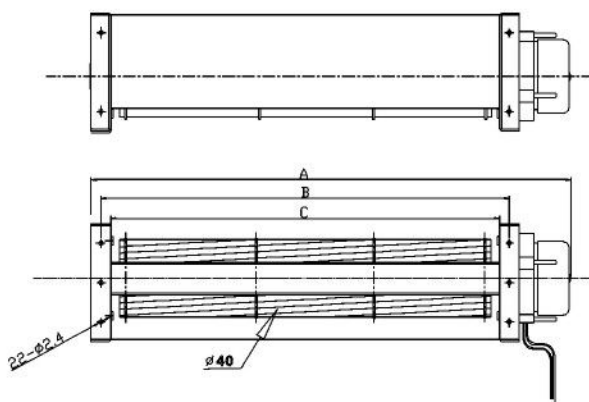

Specification is subject to change for improvement without notice / 基於改良的規格變更，不另行通知