

40

AGE series

40X40X10mm

●General Specification / 一般規格


- Motor / DC brushless motor
- Material / Frame : plastic(94V-0)
Impeller : plastic(94V-0)
- Bearing / Ball bearing;FMB;sleeve bearing
- Weight / 20g
- 馬達 / 直流單向無刷馬達
- 材質 / 框：塑膠(94V-0)
葉：塑膠(94V-0)
- 軸承 / 滾珠軸承;FMB;含油軸承
- 重量 / 20克



●Specification / 詳細規格 * 軸承/bearing B: 雙滾珠/ball bearing F:FMB S: 含油軸承/sleeve bearing

Model 機型	Bearing 軸承	Voltage 電壓	Operating Vol. 操作電壓	Current 電流	Speed 轉速	Max. Air Flow 最大風量	Max. Static Pressure 最大風壓	Sound 噪音	Weight 重量
P/N	B/S/F	V	V	A	RPM	m ³ /min CFM	mm-H ₂ O In-H ₂ O	dBA	g
AGE04010*05M	B/F/S	5	3.0~5.5	0.09	4000	0.13 4.76	1.58 0.06	19.67	20
AGE04010*05H	B/F/S	5	3.0~5.5	0.15	6000	0.19 6.83	3.31 0.13	23.04	20
AGE04010*05U	B/F/S	5	3.0~5.5	0.21	8000	0.26 9.32	5.75 0.23	28.63	20
AGE04010*05V	B/F/S	5	3.0~5.5	0.37	10000	0.33 11.58	8.71 0.34	34.36	20
AGE04010*12M	B/F/S	12	6.0~13.2	0.06	4000	0.13 4.76	1.58 0.06	19.67	20
AGE04010*12H	B/F/S	12	6.0~13.2	0.08	6000	0.19 6.83	3.31 0.13	23.04	20
AGE04010*12U	B/F/S	12	6.0~13.2	0.12	8000	0.26 9.32	5.75 0.23	28.63	20
AGE04010*12V	B/F/S	12	6.0~13.2	0.19	10000	0.33 11.58	8.71 0.34	34.36	20
AGE04010*24L	B/F/S	24	12.0~26.4	0.02	4000	0.13 4.76	1.58 0.06	19.67	20
AGE04010*24M	B/F/S	24	12.0~26.4	0.08	8000	0.26 9.32	5.75 0.23	28.63	20
AGE04010*24H	B/F/S	24	12.0~26.4	0.12	10000	0.33 11.58	8.71 0.34	34.36	20

● Drawing & panel out-cuts/ 圖面及出入風口

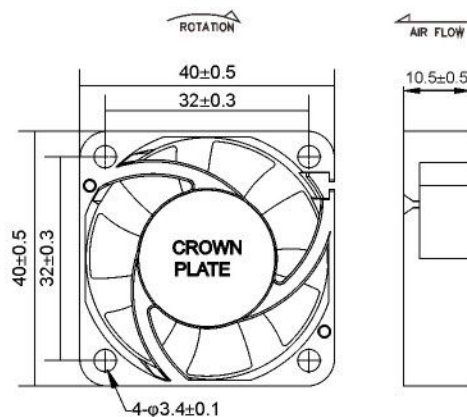

● Characteristic Curves/ 特性曲線

