

40

AGE series

40X40X20mm

●General Specification / 一般規格


- Motor / DC brushless motor
- Material / Frame : plastic(94V-0)
Impeller : plastic(94V-0)
- Bearing / Ball bearing;sleeve bearing
- Weight / 27g
- 馬達 / 直流單向無刷馬達
- 材質 / 框：塑膠(94V-0)
葉：塑膠(94V-0)
- 軸承 / 滾珠軸承;含油軸承
- 重量 / 27克



●Specification / 詳細規格 * 軸承/bearing B: 雙滾珠/ball bearing F:FMB S: 含油軸承/sleeve bearing

Model	Bearing	Voltage	Operating Vol.	Current	Speed	Max. Air Flow		Max. Static Pressure		Sound	Weight
機型	軸承	電壓	操作電壓	電流	轉速	最大風量		最大風壓		噪音	重量
P/N	B/S/F	V	V	A	RPM	m ³ /min	CFM	mm-H ₂ O	In-H ₂ O	dBA	g
AGE04020*12L	B/F	12	6.0~13.2	0.09	5000	0.15	5.29	3.25	0.13	22.79	27
AGE04020*12M	B/F	12	6.0~13.2	0.11	6500	0.20	7.14	5.39	0.21	26.20	27
AGE04020*12H	B/F	12	6.0~13.2	0.18	8600	0.28	9.78	6.58	0.26	32.89	27
AGE04020*12U	B/F	12	6.0~13.2	0.21	9500	0.31	11.1	8.20	0.32	36.41	27
AGE04020*24L	B/F	24	12.0~26.4	0.04	5000	0.15	5.29	3.25	0.13	22.79	27
AGE04020*24M	B/F	24	12.0~26.4	0.08	6500	0.20	7.14	5.39	0.21	26.20	27
AGE04020*24H	B/F	24	12.0~26.4	0.10	8600	0.28	9.78	6.58	0.26	32.89	27
AGE04020*24U	B/F	24	12.0~26.4	0.11	9500	0.31	11.1	8.20	0.32	36.41	27

●Drawing & panel out-cuts/ 圖面及出入風口

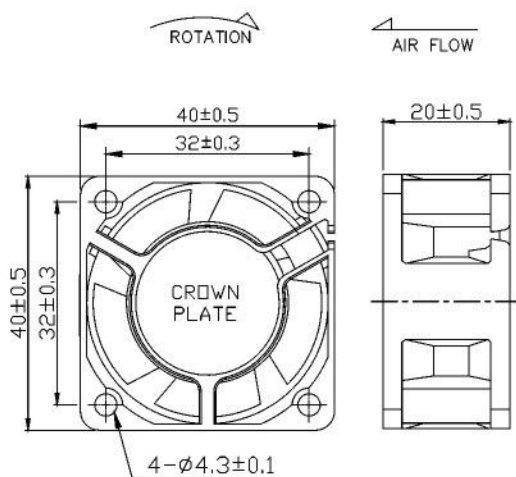

●Characteristic Curves/ 特性曲線

