

# 40

## AGB series

### 40X40X20mm

#### ●General Specification / 一般規格


- Motor / DC brushless motor
- Material / Frame : plastic(94V-0)  
Impeller : plastic(94V-0)
- Bearing / Ball bearing
- Weight / 45g
- 馬達 / 直流單向無刷馬達
- 材質 / 框：塑膠(94V-0)  
葉：塑膠(94V-0)
- 軸承 / 滾珠軸承
- 重量 / 45g



#### ●Specification / 詳細規格 \* 軸承/bearing B: 雙滾珠/ball bearing F:FMB S: 含油承軸/sleeve bearing

| Model        | Bearing | Voltage | Operating Vol. | Current | Speed | Max. Air Flow       |       | Max. Static Pressure |                     | Sound | Weight |
|--------------|---------|---------|----------------|---------|-------|---------------------|-------|----------------------|---------------------|-------|--------|
| 機型           | 軸承      | 電壓      | 操作電壓           | 電流      | 轉速    | 最大風量                |       | 最大風壓                 |                     | 噪音    | 重量     |
| P/N          | B/S/F   | V       | V              | A       | RPM   | m <sup>3</sup> /min | CFM   | mm-H <sub>2</sub> O  | In-H <sub>2</sub> O | dBA   | g      |
| AGB04020*12L | B       | 12      | 6.0~13.2       | 0.12    | 8000  | 0.27                | 9.59  | 6.12                 | 0.24                | 30.31 | 45     |
| AGB04020*12M | B       | 12      | 6.0~13.2       | 0.18    | 10000 | 0.34                | 12.03 | 9.69                 | 0.38                | 36.39 | 45     |
| AGB04020*12H | B       | 12      | 6.0~13.2       | 0.33    | 12000 | 0.41                | 14.49 | 13.68                | 0.54                | 40.47 | 45     |
| AGB04020*12U | B       | 12      | 6.0~13.2       | 0.44    | 14000 | 0.49                | 17.28 | 18.68                | 0.74                | 45.16 | 45     |
| AGB04020*12V | B       | 12      | 6.0~13.2       | 0.66    | 16000 | 0.57                | 20.11 | 23.99                | 0.94                | 48.37 | 45     |
| AGB04020*24H | B       | 24      | 12.0~26.4      | 0.14    | 12000 | 0.41                | 14.49 | 13.68                | 0.54                | 40.47 | 45     |
| AGB04020*24U | B       | 24      | 12.0~26.4      | 0.43    | 14000 | 0.49                | 17.28 | 18.68                | 0.74                | 45.16 | 45     |
| AGB04020*24V | B       | 24      | 12.0~26.4      | 0.34    | 16000 | 0.57                | 20.11 | 23.99                | 0.94                | 48.37 | 45     |

#### ● Drawing & panel out-cuts/ 圖面及出入風口

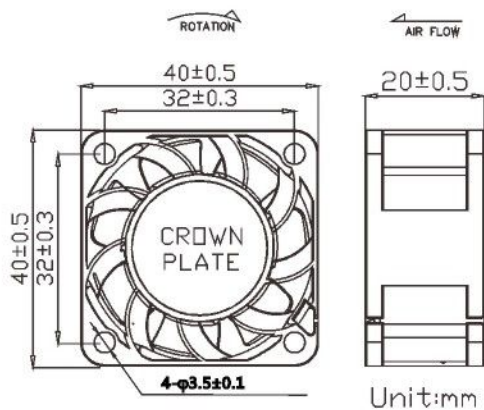

#### ● Characteristic Curves/ 特性曲線

