

60

AGE series

60X60X25mm

●General Specification / 一般規格


- Motor / DC brushless motor
- Material / Frame : plastic(94V-0)
Impeller : plastic(94V-0)
- Bearing / Ball bearing;FMB;sleeve bearing
- Weight / 57g
- 馬達 / 直流單向無刷馬達
- 材質 / 框：塑膠(94V-0)
葉：塑膠(94V-0)
- 軸承 / 滾珠軸承;FMB;含油軸承
- 重量 / 57克



●Specification / 詳細規格 * 軸承/bearing B: 雙滾珠/ball bearing F:FMB S: 含油軸承/sleeve bearing

Model	Bearing	Voltage	Operating Vol.	Current	Speed	Max. Air Flow		Max. Static Pressure		Sound	Weight
機型	軸承	電壓	操作電壓	電流	轉速	最大風量		最大風壓		噪音	重量
P/N	B/S/F	V	V	A	RPM	m³/min	CFM	mm-H₂O	In-H₂O	dBA	g
AGE06025*12J	B	12	6.0~13.2	0.07	3100	0.44	15.38	1.95	0.08	22.10	57
AGE06025*12L	B	12	6.0~13.2	0.10	3600	0.52	18.38	2.85	0.11	24.78	57
AGE06025*12M	B	12	6.0~13.2	0.13	4250	0.62	21.88	3.93	0.15	28.33	57
AGE06025*12H	B	12	6.0~13.2	0.24	5000	0.72	25.3	5.60	0.22	32.32	57
AGE06025*12U	B	12	6.0~13.2	0.35	6800	0.97	34.12	10.25	0.40	40.12	57
AGE06025*24J	B	24	12.0~26.4	0.08	3100	0.44	15.38	1.95	0.08	22.10	57
AGE06025*24L	B	24	12.0~26.4	0.09	3600	0.52	18.38	2.85	0.11	24.78	57
AGE06025*24M	B	24	12.0~26.4	0.12	4250	0.62	21.88	3.93	0.15	28.33	57
AGE06025*24H	B	24	12.0~26.4	0.20	5000	0.72	25.3	5.60	0.22	32.32	57
AGE06025*24U	B	24	12.0~26.4	0.28	6800	0.97	34.12	10.25	0.40	40.12	57

● Drawing & panel out-cuts/ 圖面及出入風口

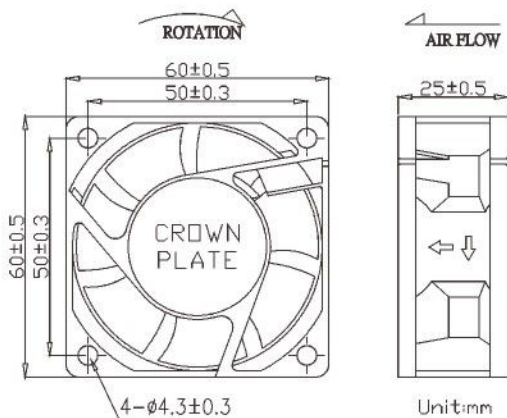

● Characteristic Curves/ 特性曲線

