

80

AGE series

80X80X15mm

●General Specification / 一般規格


- Motor / DC brushless motor
- Material / Frame : plastic(94V-0)
Impeller : plastic(94V-0)
- Bearing / Ball bearing;sleeve bearing
- Weight / 54g
- 馬達 / 直流單向無刷馬達
- 材質 / 框：塑膠(94V-0)
葉：塑膠(94V-0)
- 軸承 / 滾珠軸承;含油軸承
- 重量 / 54g



●Specification / 詳細規格 * 軸承/bearing B: 雙滾珠/ball bearing F:FMB S: 含油承軸/sleeve bearing

Model	Bearing	Voltage	Operating Vol.	Current	Speed	Max. Air Flow		Max. Static Pressure		Sound	Weight
機型	軸承	電壓	操作電壓	電流	轉速	最大風量		最大風壓		噪音	重量
P/N	B / S / F	V	V	A	RPM	m ³ /min	CFM	mm-H ₂ O	In-H ₂ O	dBA	g
AGE08015*12J	B / F / S	12	6.0~13.2	0.09	2400	0.74	26.07	1.86	0.07	23.88	54
AGE08015*12L	B / F / S	12	6.0~13.2	0.10	2700	0.83	29.41	2.31	0.09	26.50	54
AGE08015*12M	B / F / S	12	6.0~13.2	0.13	3100	0.97	34.16	3.09	0.12	30.04	54
AGE08015*12H	B / F / S	12	6.0~13.2	0.20	3600	1.10	38.96	4.02	0.16	33.51	54
AGE08015*12U	B / F / S	12	6.0~13.2	0.40	4500	1.41	49.95	6.01	0.24	38.61	54
AGE08015*24J	B / F / S	24	12.0~26.4	0.04	2400	0.74	26.07	1.86	0.07	23.88	54
AGE08015*24L	B / F / S	24	12.0~26.4	0.06	2700	0.83	29.41	2.31	0.09	26.50	54
AGE08015*24M	B / F / S	24	12.0~26.4	0.10	3100	0.97	34.16	3.09	0.12	30.04	54
AGE08015*24H	B / F / S	24	12.0~26.4	0.12	3600	1.10	38.96	4.02	0.16	33.51	54

● Drawing & panel out-cuts/ 圖面及出入風口

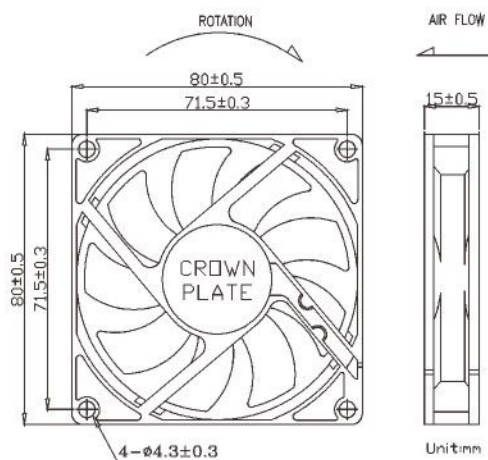

● Characteristic Curves/ 特性曲線

