

120 AGE series

120X120X38mm

●General Specification / 一般規格


- Motor / DC brushless motor
- Material / Frame : plastic(94V-0)
Impeller : plastic(94V-0)
- Bearing / Ball bearing;sleeve bearing
- Weight / 260g
- 馬達 / 直流單向無刷馬達
- 材質 / 框：塑膠(94V-0)
葉：塑膠(94V-0)
- 軸承 / 滾珠軸承；含油軸承
- 重量 / 260克



●Specification / 詳細規格 *軸承/bearing B: 雙滾珠/ball bearing F:FMB S: 含油軸承/sleeve bearing

Model	Bearing	Voltage	Operating Vol.	Current	Speed	Max. Air Flow		Max. Static Pressure		Sound	Weight
機型	軸承	電壓	操作電壓	電流	轉速	最大風量		最大風壓		噪音	重量
P/N	B/S/F	V	V	A	RPM	m³/min	CFM	mm-H ₂ O	In-H ₂ O	dBA	g
AGE12038*12M	B	12	6.0~13.2	0.33	2300	3.00	105.81	6.01	0.24	39.31	260
AGE12038*12H	B	12	6.0~13.2	0.45	2600	3.38	119.19	7.43	0.29	42.50	260
AGE12038*12U	B	12	6.0~13.2	0.73	2900	3.73	131.85	9.26	0.36	45.73	260
AGE12038*12V	B	12	6.0~13.2	0.75	3200	4.21	148.68	11.01	0.43	48.37	260
AGE12038*12W	B	12	6.0~13.2	1.53	4200	5.40	190.5	17.88	0.70	54.44	260
AGE12038*24L	B	24	12.0~26.4	0.13	2300	3.00	105.81	6.01	0.24	39.31	260
AGE12038*24M	B	24	12.0~26.4	0.22	2600	3.38	119.19	7.43	0.29	42.50	260
AGE12038*24H	B	24	12.0~26.4	0.32	2900	3.73	131.85	9.26	0.36	45.73	260
AGE12038*24U	B	24	12.0~26.4	0.44	3200	4.21	148.68	11.01	0.43	48.37	260
AGE12038*24V	B	24	12.0~26.4	0.67	4200	5.40	190.5	17.88	0.70	54.44	260
AGE12038*48I	B	48	24.0~52.8	0.10	2300	3.00	105.81	6.01	0.24	39.31	260
AGE12038*48J	B	48	24.0~52.8	0.13	2600	3.38	119.19	7.43	0.29	42.50	260
AGE12038*48L	B	48	24.0~52.8	0.21	2900	3.73	131.85	9.26	0.36	45.73	260
AGE12038*48M	B	48	24.0~52.8	0.22	3200	4.21	148.68	11.01	0.43	48.37	260
AGE12038*48H	B	48	24.0~52.8	0.45	4200	5.40	190.5	17.88	0.70	54.44	260

● Drawing & panel out-cuts/ 圖面及出入風口

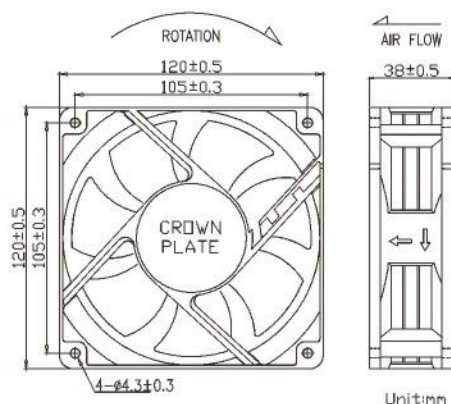

● Characteristic Curves/ 特性曲線

