

120 AGV series

120X120X38mm

●General Specification / 一般規格


- Motor / DC brushless motor
- Material / Frame : plastic(94V-0)
Impeller : plastic(94V-0)
- Bearing / Ball bearing;sleeve bearing
- Weight / 260g
- 馬達 / 直流單向無刷馬達
- 材質 / 框：塑膠(94V-0)
葉：塑膠(94V-0)
- 軸承 / 滾珠軸承；含油軸承
- 重量 / 260克



●Specification / 詳細規格 * 軸承/bearing B: 雙滾珠/ball bearing F:FMB S: 含油軸承/sleeve bearing

Model 機型	Bearing 軸承	Voltage 電壓	Operating Vol. 操作電壓	Current 電流	Speed 轉速	Max. Air Flow 最大風量		Max. Static Pressure 最大風壓		Sound 噪音	Weight 重量
P/N	B/S/F	V	V	A	RPM	m³/min	CFM	mm-H ₂ O	in-H ₂ O	dBA	g
AGV12038*12I	B	12	6.0~13.2	0.33	3000	2.92	102.93	7.89	0.31	43.70	450
AGV12038*12J	B	12	6.0~13.2	0.44	3500	3.39	119.78	10.44	0.41	47.95	450
AGV12038*12L	B	12	6.0~13.2	0.63	4000	3.99	140.83	13.82	0.54	50.84	450
AGV12038*12M	B	12	6.0~13.2	0.88	4500	4.43	156.56	16.65	0.66	54.29	450
AGV12038*12H	B	12	6.0~13.2	1.05	5000	4.94	174.53	20.14	0.79	56.29	450
AGV12038*12U	B	12	6.0~13.2	1.87	5500	5.45	192.6	24.48	0.96	59.03	450
AGV12038*24I	B	24	12.0~26.4	0.18	3000	2.92	102.93	7.89	0.31	43.70	450
AGV12038*24J	B	24	12.0~26.4	0.21	3500	3.39	119.78	10.44	0.41	47.95	450
AGV12038*24L	B	24	12.0~26.4	0.30	4000	3.99	140.83	13.82	0.54	50.84	450
AGV12038*24M	B	24	12.0~26.4	0.56	4500	4.43	156.56	16.65	0.66	54.29	450
AGV12038*24H	B	24	12.0~26.4	0.68	5000	4.94	174.53	20.14	0.79	56.29	450
AGV12038*24U	B	24	12.0~26.4	0.65	5500	5.45	192.6	24.48	0.96	59.03	450

● Drawing & panel out-cuts/ 圖面及出入風口

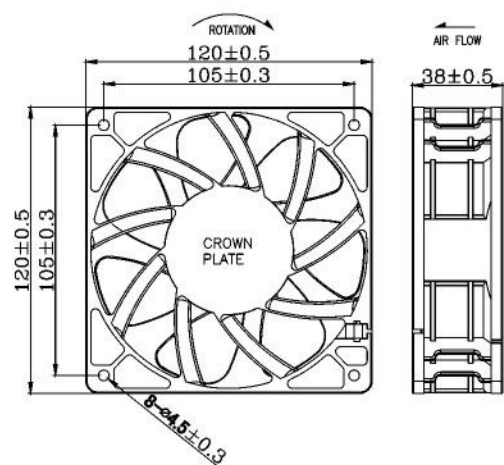

● Characteristic Curves/ 特性曲線

