

50

BGE series

50X50X15mm

●General Specification / 一般規格


- Motor / DC brushless motor
- Material / Frame : plastic(94V-0)
Impeller : plastic(94V-0)
- Bearing / Ball bearing;FMB
- Weight / 30g
- 馬達 / 直流單向無刷馬達
- 材質 / 框：塑膠(94V-0)
葉：塑膠(94V-0)
- 軸承 / 滾珠軸承;FMB
- 重量 / 30克



●Specification / 詳細規格 *軸承/bearing B: 雙滾珠/ball bearing F:FMB S: 含油軸承/sleeve bearing

Model 機型	Bearing 軸承	Voltage 電壓	Operating Voltage 操作電壓	Current 電流	Speed 回轉數	Max. Air Flow 最大風量		Max. Static Pressure 最大靜壓		Sound 騒音值	Weight 重量
Part No.	B / S / F	V	V	A	RPM	m ³ /min	CFM	mm-H ₂ O	In-H ₂ O	dBA	g
BGE05115_05M	B/S	5	4.5~5.5	0.12	4500	0.10	3.37	7.56	0.30	32.54	30
BGE05115_05H	B/S	5	4.5~5.5	0.18	5500	0.12	4.22	11.77	0.46	37.03	30
BGE05115_05U	B/S	5	4.5~5.5	0.18	6500	0.15	5.15	17.46	0.69	41.75	30
BGE05115_12M	B/S	12	7.0~13.2	0.07	4500	0.10	3.37	7.56	0.30	32.54	30
BGE05115_12H	B/S	12	7.0~13.2	0.09	5500	0.12	4.22	11.77	0.46	37.03	30
BGE05115_12U	B/S	12	7.0~13.2	0.15	6500	0.15	5.15	17.46	0.69	41.75	30
BGE05115_12V	B/S	12	7.0~13.2	0.15	7500	0.17	5.85	23.87	0.94	46.55	30
BGE05115_24M	B/S	24	14.0~26.4	0.05	4500	0.10	3.37	7.56	0.30	32.54	30
BGE05115_24H	B/S	24	14.0~26.4	0.07	5500	0.12	4.22	11.77	0.46	37.03	30
BGE05115_24U	B/S	24	14.0~26.4	0.12	6500	0.15	5.15	17.46	0.69	41.75	30

●Drawing/ 圖面及出入風口

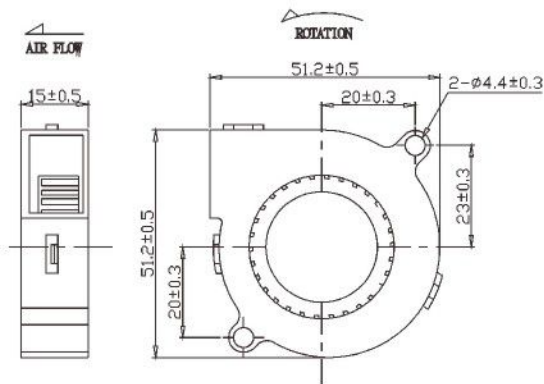

●Characteristic Curves/ 特性曲線

