

75

BGE series

75X75X30mm




●General Specification / 一般規格

- Motor / DC brushless motor
- Material / Frame : plastic(94V-0)
- Impeller : plastic(94V-0)
- Bearing / Ball bearing;FMB
- Weight / 100g
- 馬達 / 直流單向無刷馬達
- 材質 / 框：塑膠(94V-0)
- 葉：塑膠(94V-0)
- 軸承 / 滾珠軸承;FMB
- 重量 / 100克

●Specification / 詳細規格 * 軸承/bearing B: 雙滾珠/ball bearing F:FMB S: 含油軸承/sleeve bearing

Model	Bearing	Voltage	Operating Voltage	Current	Speed	Max. Air Flow		Max. Static Pressure		Sound	Weight
機型	軸承	電壓	操作電壓	電流	回轉數	最大風量		最大靜壓		騒音值	重量
Part No.	B / S / F	V	V	A	RPM	m ³ /min	CFM	mm-H ₂ O	In-H ₂ O	dBA	g
BGE07530_12J	B/F	12	7.0~13.2	0.12	2600	0.31	10.93	7.35	0.29	35.00	100
BGE07530_12L	B/F	12	7.0~13.2	0.21	3000	0.36	12.82	10.25	0.40	39.59	100
BGE07530_12M	B/F	12	7.0~13.2	0.33	3600	0.44	15.61	16.81	0.66	43.41	100
BGE07530_12H	B/F	12	7.0~13.2	0.44	4000	0.47	16.63	20.77	0.82	46.22	100
BGE07530_12U	B/F	12	7.0~13.2	0.50	5000	0.59	20.99	37.75	1.49	52.48	100
BGE07530_24J	B/F	24	14.0~26.4	0.15	2600	0.31	10.93	7.35	0.29	35.00	100
BGE07530_24L	B/F	24	14.0~26.4	0.16	3000	0.36	12.82	10.25	0.40	39.59	100
BGE07530_24M	B/F	24	14.0~26.4	0.17	3600	0.44	15.61	16.81	0.66	43.41	100
BGE07530_24H	B/F	24	14.0~26.4	0.24	4000	0.47	16.63	20.77	0.82	46.22	100
BGE07530_24U	B/F	24	14.0~26.4	0.28	5000	0.59	20.99	37.75	1.49	52.48	100

●Drawing/ 圖面及出入風口

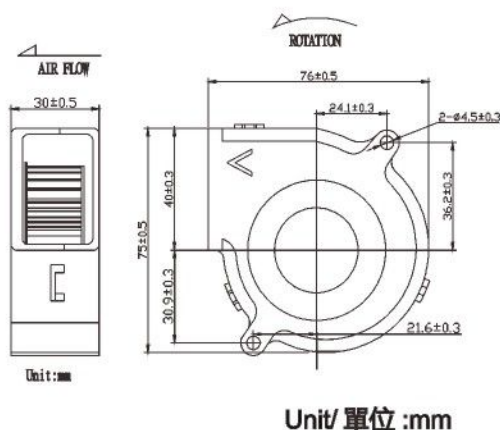

●Characteristic Curves/ 特性曲線

