

50

BGKseries

50X50X20mm

●General Specification / 一般規格


- Motor / DC brushless motor
- Material / Frame : plastic(94V-0)
Impeller : plastic(94V-0)
- Bearing / Ball bearing;FMB
- Weight / 30g
- 馬達 / 直流單向無刷馬達
- 材質 / 框：塑膠(94V-0)
葉：塑膠(94V-0)
- 軸承 / 滾珠軸承;FMB
- 重量 / 30克



●Specification / 詳細規格 * 軸承/bearing B: 雙滾珠/ball bearing F:FMB S: 含油軸承/sleeve bearing

Model 機型	Bearing 軸承	Voltage 電壓	Operating Voltage 操作電壓	Current 電流	Speed 回轉數	Max. Air Flow 最大風量		Max. Static Pressure 最大靜壓		Sound 騒音值	Weight 重量
Part No.	B / S / F	V	V	A	RPM	m ³ /min	CFM	mm-H ₂ O	In-H ₂ O	dBA	g
BGK05020_05M	F	5	4.5~5.5	0.14	4200	0.14	4.98	4.38	0.17	22.79	30
BGK05020_05H	F	5	4.5~5.5	0.20	5200	0.17	6.16	6.72	0.26	28.77	30
BGK05020_05U	F	5	4.5~5.5	0.27	6200	0.20	7.07	8.75	0.34	33.49	30
BGK05020_12M	F	12	6.0~13.2	0.15	4200	0.14	4.98	4.38	0.17	22.79	30
BGK05020_12H	F	12	6.0~13.2	0.18	5200	0.17	6.16	6.72	0.26	28.77	30
BGK05020_12U	F	12	6.0~13.2	0.20	6200	0.20	7.07	8.75	0.34	33.49	30

● Drawing/ 圖面及出入風口

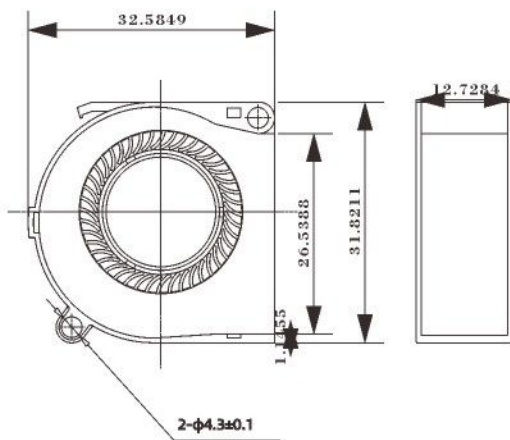

● Characteristic Curves/ 特性曲線

