

# 92

## AGJ series

### 92X92X25mm

#### ●General Specification / 一般規格


- Motor / DC brushless motor
- Material / Frame : plastic(94V-0)  
Impeller : plastic(94V-0)
- Bearing / Ball bearing;FMB
- Weight / 89g
- 馬達 / 直流單向無刷馬達
- 材質 / 框：塑膠(94V-0)  
葉：塑膠(94V-0)
- 軸承 / 滾珠軸承;FMB
- 重量 / 89克



#### ●Specification / 詳細規格 \*軸承/bearing B: 雙滾珠/ball bearing F:FMB S: 含油承軸/sleeve bearing

Model	Bearing	Voltage	Operating Vol.	Current	Speed	Max. Air Flow		Max. Static Pressure		Sound	Weight
機型	軸承	電壓	操作電壓	電流	轉速	最大風量		最大風壓		噪音	重量
P/N	B/S/F	V	V	A	RPM	m <sup>3</sup> /min	CFM	mm-H <sub>2</sub> O	In-H <sub>2</sub> O	dB(A)	g
AGJ9225*12L	B/F	12	6.0~13.2	0.16	3500	1.88	66.39	7.44	0.29	37.11	85
AGJ9225*12M	B/F	12	6.0~13.2	0.30	4500	2.36	83.25	11.41	0.45	43.88	85
AGJ9225*12H	B/F	12	6.0~13.2	0.59	5500	2.91	102.6	16.64	0.66	50.08	85
AGJ9225*12U	B/F	12	6.0~13.2	0.76	6000	3.20	113.05	19.21	0.76	52.57	85
AGJ9225*24L	B/F	24	12.0~26.4	0.09	3500	1.88	66.39	7.44	0.29	37.11	85
AGJ9225*24M	B/F	24	12.0~26.4	0.18	4500	2.36	83.25	11.41	0.45	43.88	85
AGJ9225*24H	B/F	24	12.0~26.4	0.30	5500	2.91	102.6	16.64	0.66	50.08	85
AGJ9225*24U	B/F	24	12.0~26.4	0.40	6000	3.20	113.05	19.21	0.76	52.57	85

#### ● Drawing & panel out-cuts/ 圖面及出入風口

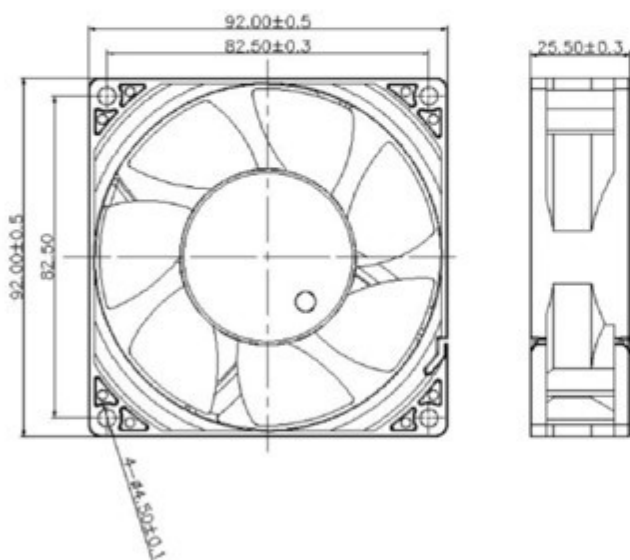

#### ● Characteristic Curves/ 特性曲線

