

# 30

## AGE series

### 30X30X10mm

#### ●General Specification / 一般規格


- Motor / DC brushless motor
- Material / Frame : plastic(94V-0)  
Impeller : plastic(94V-0)
- Bearing / Ball bearing;Sleeve
- Weight / 11g
- 馬達 / 直流單向無刷馬達
- 材質 / 框：塑膠(94V-0)  
葉：塑膠(94V-0)
- 軸承 / 滾珠軸承/含油軸承
- 重量 / 11克



#### ●Specification / 詳細規格 \* 軸承/bearing B: 雙滾珠/ball bearing F:FMB S: 含油承軸/sleeve bearing

| Model        | Bearing | Voltage | Operating Vol. | Current | Speed | Max. Air Flow       |      | Max. Static Pressure |                     | Sound | Weight |
|--------------|---------|---------|----------------|---------|-------|---------------------|------|----------------------|---------------------|-------|--------|
| 機型           | 軸承      | 電壓      | 操作電壓           | 電流      | 轉速    | 最大風量                |      | 最大風壓                 |                     | 噪音    | 重量     |
| P/N          | B/S/F   | V       | V              | A       | RPM   | m <sup>3</sup> /min | CFM  | mm-H <sub>2</sub> O  | In-H <sub>2</sub> O | dBA   | g      |
| AGE03010*05L | B/F     | 5       | 3.0~5.5        | 0.17    | 6000  | 0.08                | 2.97 | 2.15                 | 0.08                | 19.32 | 10     |
| AGE03010*05M | B/F     | 5       | 3.0~5.5        | 0.19    | 7500  | 0.11                | 3.91 | 3.52                 | 0.14                | 20.78 | 10     |
| AGE03010*05H | B/F     | 5       | 3.0~5.5        | 0.28    | 9000  | 0.13                | 4.70 | 5.83                 | 0.23                | 24.64 | 10     |
| AGE03010*05U | B/F     | 5       | 3.0~5.5        | 0.37    | 11000 | 0.14                | 4.96 | 7.69                 | 0.30                | 29.13 | 10     |
| AGE03010*12L | B/F     | 12      | 6.0~13.2       | 0.06    | 6000  | 0.08                | 2.97 | 2.15                 | 0.08                | 19.32 | 10     |
| AGE03010*12M | B/F     | 12      | 6.0~13.2       | 0.08    | 7500  | 0.11                | 3.91 | 3.52                 | 0.14                | 20.78 | 10     |
| AGE03010*12H | B/F     | 12      | 6.0~13.2       | 0.12    | 9000  | 0.13                | 4.70 | 5.83                 | 0.23                | 24.64 | 10     |
| AGE03010*12U | B/F     | 12      | 6.0~13.2       | 0.19    | 11000 | 0.14                | 4.96 | 7.69                 | 0.30                | 29.13 | 10     |

#### ● Drawing & panel out-cuts/ 圖面及出入風口

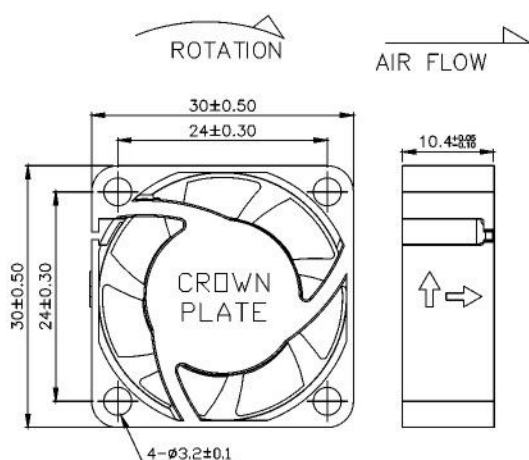

#### ● Characteristic Curves/ 特性曲線

