

120 AGE series

120X120X25mm

●General Specification / 一般規格


- Motor / DC brushless motor
- Material / Frame : plastic(94V-0)
Impeller : plastic(94V-0)
- Bearing / Ball bearing;FMB;sleeve bearing
- Weight / 152g
- 馬達 / 直流單向無刷馬達
- 材質 / 框：塑膠(94V-0)
葉：塑膠(94V-0)
- 軸承 / 滾珠軸承;FMB;含油軸承
- 重量 / 152克



●Specification / 詳細規格 *軸承/bearing B: 雙滾珠/ball bearing F:FMB S: 含油軸承/sleeve bearing

Model 機型	Bearing 軸承	Voltage 電壓	Operating Vol. 操作電壓	Current 電流	Speed 轉速	Max. Air Flow 最大風量		Max. Static Pressure 最大風壓		Sound 噪音	Weight 重量
P/N	B / S / F	V	V	A	RPM	m ³ /min	CFM	mm-H ₂ O	in-H ₂ O	dBA	g
AGE12025*12J	B / F / S	12	6.0~13.2	0.04	1200	1.25	44.21	1.16	0.05	18.54	152
AGE12025*12L	B / F / S	12	6.0~13.2	0.13	1900	2.02	71.27	2.97	0.12	29.87	152
AGE12025*12M	B / F / S	12	6.0~13.2	0.22	2200	2.37	83.55	3.83	0.15	34.14	152
AGE12025*12H	B / F / S	12	6.0~13.2	0.32	2500	2.65	93.46	4.70	0.19	37.65	152
AGE12025*12U	B / F / S	12	6.0~13.2	0.37	2800	2.99	105.44	5.69	0.22	40.81	152
AGE12025*12V	B / F / S	12	6.0~13.2	0.43	3100	3.25	114.66	6.93	0.27	43.07	152
AGE12025*24J	B / F / S	24	12.0~26.4	0.03	1200	1.25	44.21	1.16	0.05	18.54	152
AGE12025*24L	B / F / S	24	12.0~26.4	0.11	1900	2.02	71.27	2.97	0.12	29.87	152
AGE12025*24M	B / F / S	24	12.0~26.4	0.13	2200	2.37	83.55	3.83	0.15	34.14	152
AGE12025*24H	B / F / S	24	12.0~26.4	0.15	2500	2.65	93.46	4.70	0.19	37.65	152
AGE12025*24U	B / F / S	24	12.0~26.4	0.20	2800	2.99	105.44	5.69	0.22	40.81	152

● Drawing & panel out-cuts/ 圖面及出入風口

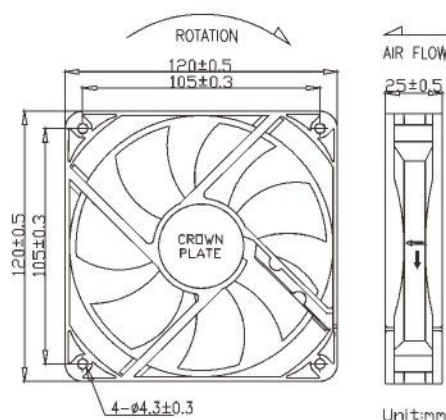

● Characteristic Curves/ 特性曲線

